




CLIMATERM

SOLUTII PROFESIONALE

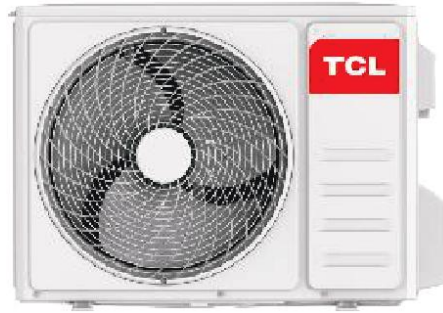

Specificatii tehnice ale aerului conditionat tip inverter split D cu agent frigorific R32, noua eficienta pentru Europa

MODEL		TCL	R 32 - 9000 BTU
Tip			pompa de caldura
Tip control			telecomanda
Capacitatea de racire declarata	W		2600(940~3320)
Capacitatea de incalzire declarata	W		2610(940~3380)
SEER declarat *	W/W		6.5
Clasa energetica			A++
SCOP mediu declarat**	W/W		4
Clasa energetica			A+
Consumul anual de energie	Racire	kwh/a	140
	Incalzire	kwh/a	735
Indeprtarea umiditatii	l/h		0.9
Putere sonora interior (H/ML/Mute)		dB(A)	50/43/35/32
Putere sonora exterior		dB(A)	60
Presiune sonora interior		dB(A)	40/33/25/22
Presiune sonora exterior		dB(A)	50
Date electrice			
Alimentare			220-240V~/50Hz/1P
Domeniu tensiune		V	165~265
Curent	Racire	A	4.0(1.2~6.3)
	Incalzire	A	4.1(1.2~6.5)
Putere	Racire	W	750(240 ~ 1230)
	Incalzire	W	752(240 ~ 1280)
Sistemul refrigerant			
Agent frigorific		Kg	R32/0.53Kg
Compresor	Tip		Rotativ
	Producator		GMCC
Circulatia aerului la interior		m ³ /h	420/420
Tip ventilator interior			turbina axial-radial
Tip ventilator exterior			polipropilena

ENERG Y IJA
енергия · ενεργεια IE IA

TCL TCL-09INV-WIFI

SEER **A++** SCOP **A+**

kW 2,6 SEER 6,5 kWh/annum 140

kW X 2,1 X SCOP X 4,0 X kWh/annum X 735 X

50dB 60dB

ENERGIA · ΕΝΕΡΓΙΑ · ENERPIJA · ENERGIJA · ENERGY · ENERGIE · ENERGI
626/2011



CLIMATERM

SOLUTII PROFESIONALE

Conexiuni			
Cabluri de conectare	Nr. x Sectiune		4x1.0mm ²
Dispozitiv de expansiune			Capilar
Conducta de conectare	Gaz	Inch.	3/8"
	Lichid	Inch.	1/4"
Altele			
Domeniul de aplicare		m ²	9~16
Lungimea max. a conductei refriger.		m	25
Dif. de nivel max.		m	10
Domeniul temperaturii de lucru		°C	16-31
Domeniul temperaturii ambientale	Exterior	°C	Racire:0-53/Incalzire:-20-30
	Interior	°C	Racire:17-32/Incalzire:0-30
Dimensiuni nete (W x H x D)	Interior	mm	700x255x190
	Exterior	mm	715x240x492
Masa neta	Interior	kg	6.5
	Exterior	kg	22
Dimensiuni de ambalare (W x H x D) w/o cond.	Interior	mm	764x325x257
	Exterior	mm	818x325x520
w/i conducta	Exterior	mm	818x325x520
Masa bruta	Interior	kg	8.5
	Exterior	kg	25(fara kit)/26(cu kit)

* Rata eficientei energetice pe sezon

**Coeficient de performanta pe sezon



I feel



self
cleaning



gas leak
detection



smart air
flow



comfortable
cooling



I set



Louver position
memory



WIFI control



Eco energy
saving



Sleep mode